

品號 Washer No.	適用螺絲直徑 Screw/Thread Size			墊圈尺寸 Lock Washer Dimension (mm)							包裝			
	公制 mm	英制 Inch	美規番號 Code(#)	d		D		t		n	最低訂購數 MOQ/MPQ			
內徑 ID.(mm)				公差 Tol.	外徑 OD.(mm)	公差 Tol.	厚度 Thickness	公差 Tol.	齒數 Nos of Teeth					
AW- 2.5(2.6)	2.5(2.6)	—	—	2.7	+0.2	5.7	+0	0.3	±0.025	7	20,000			
3	3	—	3.2	6.5		0.45		6		20,000				
3	3	—	3.2	6.5		0.45		7		20,000				
3.5	3.5	—	3.7	7.5		0.45		8		10,000				
6#	—	0.138	6#	3.8		7.5		0.45		±0.035	8	10,000		
4	4	—	4.3	8.5		0.45		8		10,000				
8#	—	0.164	8#	4.4		8.3		-0.35		0.45	8	10,000		
8#	—	0.164	8#	4.4		8.3		0.5		8	10,000			
10#	—	0.186	10#	5		9.6		0.5		±0.04	8	5,000		
5	5	—	5.3	10		0.5		8		5,000				
5	5	—	5.3	10	0.6	8	5,000							
6	6	—	6.4	11	0.6	9	5,000							
1/4"	—	1/4	—	6.5	+0.3	12	0.6	9	3,000					
7	7	—	—	7.4	13	0.8	10	3,000						
5/16"	—	5/16	—	8.3	-0	15.4	+0	0.7	±0.05	10	3,000			
8	8	—	—	8.4	15	-0.5	0.8	9	3,000					
3/8"	—	3/8	—	9.8	17.5	0.8	9	2,000						
3/8"	—	3/8	—	9.8	17.5	0.8	10	2,000						
10	10	—	—	10.5	+0.4	18	+0	0.9	±0.055	9	2,000			
7/16"	—	7/16	—	11.4		19.6		0.8		12	2,000			
12	12	—	—	12.5		21		1		10	2,000			
1/2"	—	1/2	—	13		22.5		1		12	2,000			
5/8"	—	5/8	—	16.5		27		-0.6		1.1	12	1,000		
18	18	—	—	19		29		1.2		±0.065	12	500		
3/4"	—	3/4	—	19.6		+0.5		32		+0.3	1.2	12	500	
7/8"	—	7/8	—	23.1		-0		35.5		-0.4	1.3	12	500	
1"	—	1	—	26		+0.5		41		+0.5	1.5	±0.08	12	500
1-1/8"	—	1 1/8	—	29.6				46			1.5		12	200
1-1/4"	—	1 1/4	—	33	-0.2	49	-0.2	1.5	10	200				

*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

Copyright (c) 2020 HJ Spring Co., Ltd. All Rights Reserved

*Other sizes may be available upon request




◎ 規格標準 Standard Reference

日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN6797 Form J

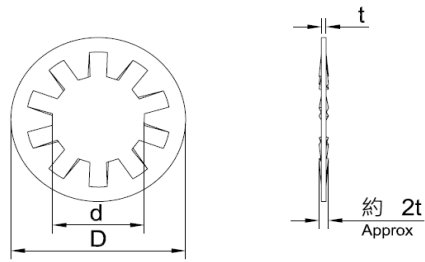

◎ 材質&硬度(參考) Material & Hardness Ranges (Rockwell scale)

彈簧鋼 · 硬度HRC 44-53 Carbon Spring Steel SAE1050~SAE1070, HRC44~HRC53

◎ 表面 Finish

染黑 Black Oxide

鍍白鋅/五彩鋅 Zinc Plating (Bright/Yellow)

鍍鎳 Nickel Plating

◎ 包裝方式 Packaging

散裝 Bulk

最低訂購數量詳見本規格表右側 MOQ/MPQ limit required

HJ SPRING