

品號 Washer No.	適用螺絲直徑 Screw/Thread Size			墊圈尺寸 Lock Washer Dimension (mm)							包裝 Packing	
	公制 mm	英制 Inch	美規番號 Code(#)	d		D		t		n		
內徑 ID.(mm)				公差 Tol.	外徑 OD.(mm)	公差 Tol.	厚度 Thickness	公差 Tol.	齒數 Nos of Teeth		最低訂購數 MOQ/MPQ	
BW- 2	2	—	—	2.2	+0.2	4.8	+0	0.3	±0.025	8	20,000	
2.5(2.6)	2.5(2.6)	—	2.7	5.7		-0.35	0.3	8		20,000		
3	3	—	3.2	-0		6.5	+0	0.45	±0.035	8	20,000	
3.5	3.5	—	3.7			7.5		0.45		8	10,000	
6#	—	0.138	6#			3.6		8.1	0.45	8	10,000	
4	4	—	4.3			4.3		8.5	0.45	8	10,000	
8#	—	0.164	8#			4.3		9.6	0.6	9	10,000	
10#	—	0.190	10#			5		10.4	0.5	9	5,000	
10#	—	0.190	10#			5		10.4	0.5	10	5,000	
10#	—	0.190	10#			5		10.4	0.6	9	5,000	
5	5	—	5.3		+0.3	10		-0.4	0.6	±0.04	10	5,000
6	6	—	6.4			11			0.6		12	5,000
1/4"	—	1/4	6.6	12.9		0.6	12		5,000			
1/4"	—	1/4	6.6	12.9		0.7	10		5,000			
1/4"	—	1/4	6.6	12.9		0.8	10		5,000			
5/16"	—	5/16	8.3	15.4		0.7	12		3,000			
5/16"	—	5/16	8.3	15.4		0.8	12		3,000			
8	8	—	8.4	15		0.8	12		3,000			
3/8"	—	3/8	9.8	17.5		0.9	12		3,000			
3/8"	—	3/8	9.8	17.5		1	12		3,000			
10	10	—	10.5	-0.5	18	+0	0.9	±0.055	12	3,000		
7/16"	—	7/16	11.4		19.5		0.9		12	2,000		
12	12	—	12.5		21		1	12	2,000			
1/2"	—	1/2	13		22.7		1	12	2,000			
14	14	—	14.5		23		1	12	1,000			
9/16"	—	9/16	14.7		24.9		1.1	12	1,000			
5/8"	—	5/8	16.5		27		1.2	14	1,000			
3/4"	—	3/4	19.6		32		1.2	14	500			
7/8"	—	7/8	23		35.6		1.5	12	500			
1"	—	1	26		41		1.5	16	500			

*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

Copyright (c) 2020 HJ Spring Co., Ltd. All Rights Reserved

*Other sizes may be available upon request



◎ 規格標準 Standard Reference

日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN6797 Form A


◆ BW型-外齒型墊圈

BW SERIES EXTERNAL TOOTHED LOCK WASHER

 華志彈簧五金有限公司

HJ Spring Co., Ltd.

TEL:886-2-29919909 FAX:886-2-29945768

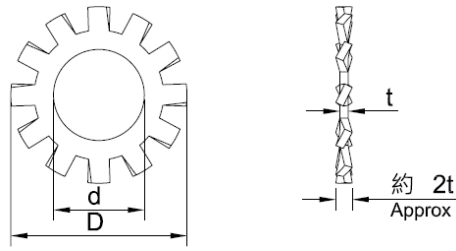

◎ 材質&硬度(參考) Material & Hardness Ranges (Rockwell scale)

彈簧鋼 · 硬度HRC 44-53 Carbon Spring Steel SAE1050~SAE1070, HRC44~HRC53

◎ 表面 Finish

染黑 Black Oxide

鍍白鋅/五彩鋅 Zinc Plating (Bright/Yellow)

鍍鎳 Nickel Plating

◎ 包裝方式 Packaging

散裝 Bulk

最低訂購數量詳見本規格表右側 MOQ/MPQ limit required

HJ SPRING